




Note: The product images shown may change over time as products are updated.

Dimensions

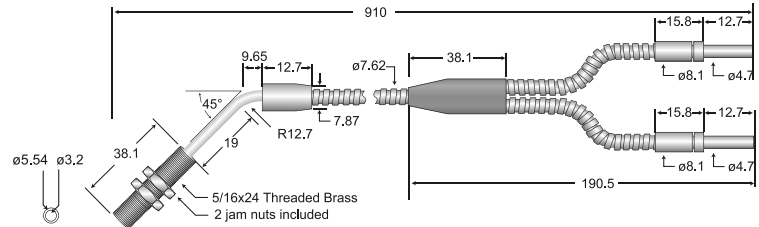

Part Number

GD-TH516-3.2

Features

- Powerful and very rugged
- Can carry infrared light to provide a longer range
- Reliable in extreme temperatures and harsh environments

Technical Data

| | |
|-----------------------|-----------------------------------|
| Type | Glass Fiber Optics |
| Mode | Diffused |
| Fiber Bundle Diameter | 3.2 mm |
| Viewing Angle | 45 Degree |
| Thread Location | Tip |
| Thread / Material | 5/16-24 UNF-2A / Brass |
| Sheath Material | Stainless Steel |
| Length | 910 mm |
| Temperature Range | -50 ° to 480 °F (-45 ° to 249 °C) |
| Minimum Bend Radius | 2.5x Sheathing OD |



In the USA: 1889 Maryland Ave., Niagara Falls, NY 14305
 In Canada: 3419 Mainway, Burlington, ON L7M 1A9
 Toll Free: 1-800-644-1756 • Fax: 888-283-2127
 service@htmsensors.com