



Note: The product images shown may change over time as products are updated.

### Part Number


**ECS1-1204U-A3U2-PTFE-100C**

### Features


Inductive Proximity Sensors are used in a wide variety of manufacturing operations where a metal target needs to be sensed. HTM Sensors inductive proximity sensors have a Lifetime Warranty, a CSA or UL approval, and a huge inventory for same-day shipping. For tougher applications where the sensors need more range to stay out of harm's way, or to withstand high temperatures, weld spatter, chemical exposure, oil or other rough environments, HTM Sensors has the widest range of proximity sensors on the market.

### Connection

#### Normally Open

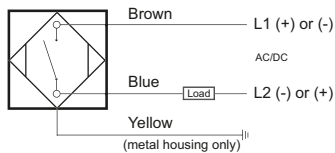

### Dimensions

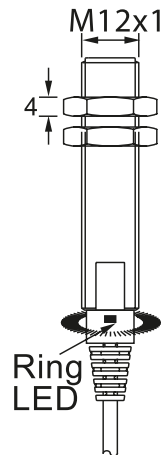

Body Length (mm)  
60

### Technical Data

|                            |  |
|----------------------------|--|
| Body Style                 | Cylindrical                            |
| Sensor Housing Material    | Stainless Steel SUS303                 |
| Sensor Face Material       | 1-Piece Stainless Steel                |
| Mounting Style             | Shielded                               |
| Diameter                   | 12 mm Threaded                         |
| Sensing Range:             | 4 mm Range                             |
| Output Type:               | AC/DC Output                           |
| Output Function            | Normally Open Output                   |
| Connection                 | Pre-Three Wired Cable Connect          |
| Connector Type             | Cable                                  |
| Operating Voltage          | 20-250 VAC, 50-60HZ; 20-250 VDC        |
| Switching Frequency        | 25 Hz AC; 40 Hz DC                     |
| Operating Temperature      | -20 °C - +100 °C                       |
| Current Consumption        | <2.5mA                                 |
| IP Rating:                 | IP68                                   |
| EMC Rating                 | RFI>3V/m / EFT>1kV / ESD>4Kv (contact) |
| Shock Rating:              | IEC 60497-5-2 Part 7.4.1&7.4.2         |
| Short Circuit Protected    | Yes                                    |
| Reverse Polarity Protected | NO                                     |
| Max Current                | 100 mA                                 |
| Leakage Current            | <2.5mA                                 |
| Surge Current              | 2.2 A for 20 ms                        |
| Response Time              | 10 ms/10 ms                            |
| Hysteresis                 | <15%(Sr)                               |
| Overload Trip Point        | -                                      |
| Weld Field Immune          | No                                     |
| Weld Spatter Resistant     | Yes - SpatterGuard™ Coated             |
| Body Length (mm)           | 60                                     |