


- PNEUMATIC CYLINDER SENSORS FOR THE RELIABLE CONTROL OF PNEUMATIC ACTUATORS
- SINGLE AND DUAL HEAD DESIGNS
- SLIM FIT PLASTIC HOUSINGS FOR EASY MOUNTING, OR RUGGED METAL HOUSINGS FOR TOUGH APPLICATIONS
- MOUNTING FOR POPULAR ACTUATOR PROFILES INCLUDING T-SLOT, C-SLOT AND TUBULAR
- DROP-IN REPLACEMENTS FOR POPULAR FESTO® STYLE, SMC® STYLE AND CANFIELD® STYLE
- AVAILABLE WITH M8 OR M12 PIGTAIL CONNECTORS, OR WITH PRE-WIRED CABLES
- AVAILABLE WITH PNP, NPN OR REED OR AUTO SELECT

# PNEUMATIC CYLINDER SENSORS SPECIFICATIONS



	C-SLOT		DROP-IN C-SLOT	DROP-IN T-SLOT	DROP-IN DUAL C-SLOT	DROP-IN DUAL T-SLOT
DIMENSIONS (mm)	4 D x 4.6 H x 25.5 L		2.8 W x 5.3 H x 17 L	5.1 W x 6.1 H x 18 L	2.8 W x 5.3 H x 17 L	5.1 W x 6.1 H x 18 L
OPERATING VOLTAGE SOLID STATE	5-28 V DC		5-30 V DC	5-30 V DC	5-30 V DC	5-30 V DC
OPERATING VOLTAGE REED	5-120 V AC/DC		-	-	-	-
CONNECTION	PRE-WIRED	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL	0.3 m PIGTAIL
CONNECTOR	-	M8 3-PIN	M8 3-PIN	M8 3-PIN	M12 4-PIN	M12 4-PIN
<b>PART NUMBERS</b>						
PNP VERSION - Open	PCSC-04/25P-A3U3	PCSC-04/25P-A3U0.3/P8	PCDC-05/17S-A3S0.3/P8 (Auto Select PNP/NPN)	PCDT-06/18S-A3S0.3/P8 (Auto Select PNP/NPN)	PCDC-D05/17S-A4S0.3/P12 (Auto Select PNP/NPN)	PCDT-D06/18S-A4S0.3/P12 (Auto Select PNP/NPN)
NPN VERSION - Open	PCSC-04/25N-A3U3	PCSC-04/25N-A3U0.3/P8				
REED VERSION - Open	PCSC-04/25R-A3U3	PCSC-04/25R-A3U0.3/P8	-	-	-	-
MATING CABLE	-	C-FS3TZ-V885	C-FS3TZ-V885	C-FS3TZ-V885	R-FS4TZ-V885	R-FS4TZ-V885

NOTE: Specifications subject to change without notification.

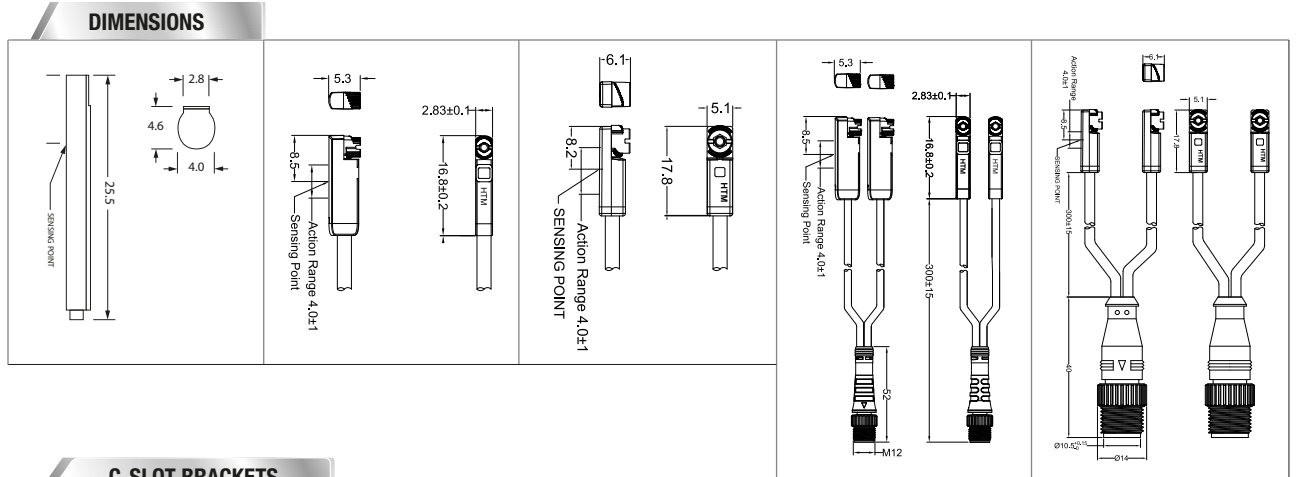

**C-SLOT BRACKETS**

TIE ROD CYLINDERS		ROUND CYLINDERS	
PC+PCE	PC+PCD	PCB-01	PCB-02
1-1/2" - 2-1/2" BORE	3-1/4" - 8" BORE	244 mm BAND	485 mm BAND