

HTMTM
SENSORS




- INDUSTRY STANDARD FORMS (A, B, BI, C, CI)
- AVAILABLE WITH LED AND/OR BUILT-IN SUPPRESSION
- SUPPLIED WITH NBR GASKETS
- BUILT-IN LABEL PLATE
- PVC OR PUR CABLE JACKET AVAILABLE

SOLENOID CABLES SPECIFICATIONS



	FORM A	FORM B INDUSTRIAL	FORM B	FORM C INDUSTRIAL	FORM C
FEMALE CONNECTOR	Angled	Angled	Angled	Angled	Angled
CONTACT SPACING	18 mm	11 mm	10 mm	9.4 mm	8 mm
NUMBER OF POLES	2 + 2 PE	2 + PE	2 + PE	2 + 2 PE	2 + 2 PE
EARTH POSITION	12 & 6	12 & 6	12 or 6	12 & 6	12 & 6
CABLE MATERIAL	PVC				
SECURING SCREW	M3 x 0.5 L28 mm			M3 x 0.5 L22.5 mm	M2.5 x 0.5 L22.5 mm
PROTECTION	IP67				
PART NUMBERS					
24 V AC/DC with LED and MOV	V-AFA2V/R1C-V535	V-B1FA2V/R1C-V535	V-BFA2V/R1A-V535 (Earth position 6) V-BFA2V/R1B-V535 (Earth position 12)	V-C1FA2V/R1C-V535	V-CFA2V/R1C-V535
115 V AC/DC with LED and MOV	V-AFA2V/R2C-V535	V-B1FA2V/R2C-V535	V-BFA2V/R2A-V535 (Earth position 6) V-BFA2V/R2B-V535 (Earth position 12)	V-C1FA2V/R2C-V535	V-CFA2V/R2C-V535
230 V AC/DC No LED or Suppression	V-AFA2U/NOC-V535	V-B1FA2U/NOC-V535	V-BFA2U/NOA-V535 (Earth position 6) V-BFA2U/NOB-V535 (Earth position 12)	V-C1FA2U/NOC-V535	V-CFA2U/NOC-V535

Custom lengths and connector styles are available. NOTE: Specifications subject to change without notification.

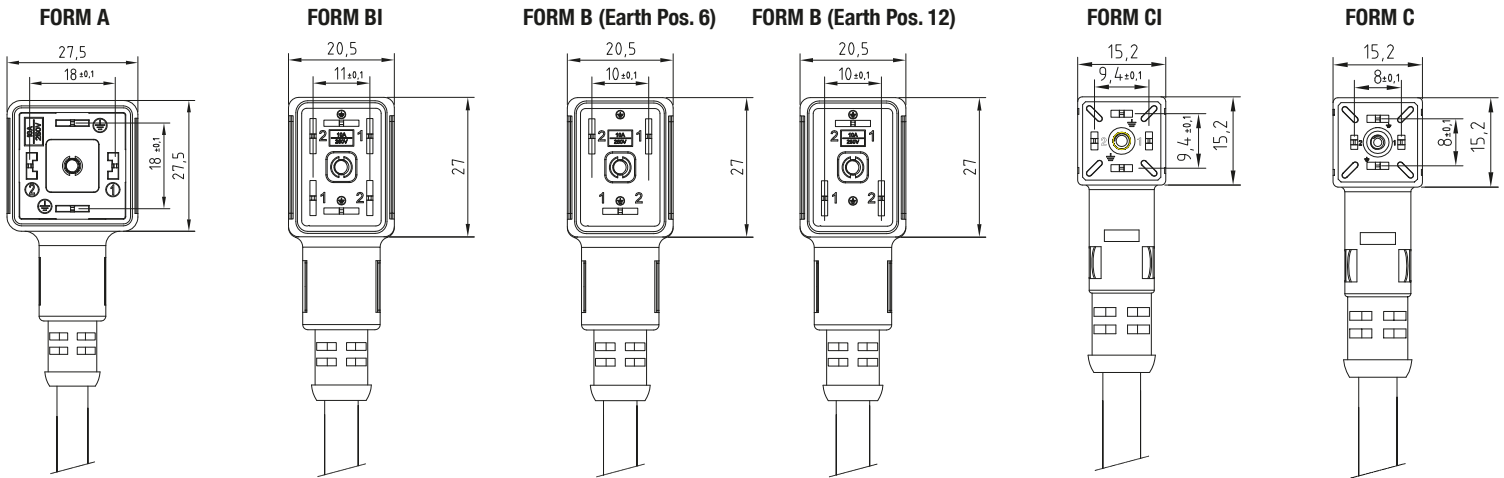

	FORM A	FORM BI	FORM B	FORM CI	FORM C
SOLENOID FIELD CONNECTORS					
24 V AC/DC LED and MOV	FC-AFA2V/R1-PG9/11T	FC-B1FA2V/R1-PG9T	FC-BFA2U/NO-PG9	FC-C1FA2V/R1-PG7T	FC-CFA2V/R1-PG7T
230 V AC/DC	FC-AFA2U/NO-PG9/11	FC-B1FA2U/NO-PG9	FC-BFA2U/NO-PG9	FC-C1FA2U/NO-PG7	FC-CFA2U/NO-PG7